

Single Function Showerhead



CERTIFIED SUPERIOR PERFORMANCE

part	max flow at 80 psi	min flow at 45 psi
1.5 gpm Showerhead	1.5gpm (5.7 L/min)	1.1gpm (4.2 L/min)
1.75 gpm Showerhead	1.75gpm (6.6 L/min)	1.3gpm (4.9 L/min)
2.0 gpm Showerhead	2.0gpm (7.6 L/min)	1.5gpm (5.7 L/min)



FEATURES

- Single function, full-body spray
- 54 rub-clean, anti-clog spray nozzles
- Pressure compensating flow regulation
- 3 year warranty

PHYSICAL CHARACTERISTICS

- ABS 1/2" NPT fittings (female)
- Plated ABS body
- Spray face diameter: 3.125" (7.9 cm)
- Length: 3.125" (7.9 cm)
- Weight: 4.25 oz (0.12 kg)

PRODUCT SPECIFICATION

The Single Function Showerhead has ABS fittings and shall attach to shower arms with 1/2" NPT male fittings; a 54 nozzle full body spray and is both WaterSense and cUPC certified.


CODES / STANDARDS APPLICABLE

SPECIFIC MODEL MEETS OR EXCEEDS THE FOLLOWING:

- WaterSense & Uniform Plumbing Codes (cUPC): IAPMO IGC 244-2007a & ASME A112.18.1-2011/CSA B125.1-11.
- Conforms to A112.18.1M. For use with automatic compensating valves rated at 1.1 gpm (4.2 L/min) or less.

PERFORMANCE VS. WATERSENSE STANDARD

WaterSense was created by the EPA to establish minimum performance requirements for efficient showerheads with the goal of improving user satisfaction. This showerhead exceeds the WaterSense standard and, as a result, users receive a great feeling, water and energy saving shower regardless of their home's water pressure.

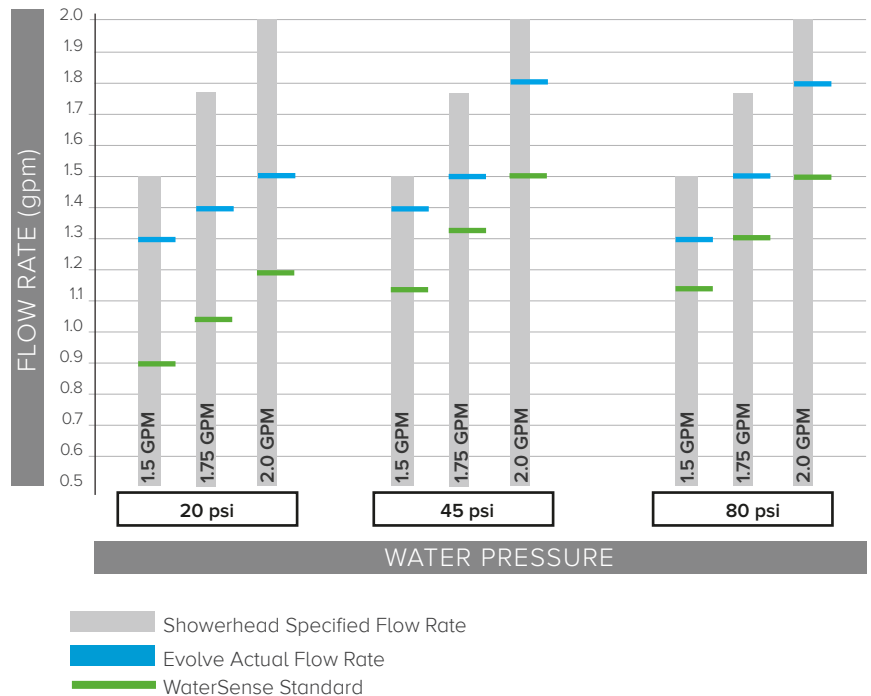

SPECIFIED MODEL

MODEL	DESCRIPTION	FINISH	SPRAY PATTERN	FLOW RATE	PKG
EV3010-CP150-SB	WaterSense Showerhead	chrome	full body	1.5 gpm (5.7 L/min)	single
EV3010-CP175-SB	WaterSense Showerhead	chrome	full body	1.75 gpm (6.6 L/min)	single
EV3010-CP200-SB	WaterSense Showerhead	chrome	full body	2.0 gpm (7.6 L/min)	single
EV3010-CP150-BP	WaterSense Showerhead	chrome	full body	1.5 gpm (5.7 L/min)	bulk
EV3010-CP175-BP	WaterSense Showerhead	chrome	full body	1.75 gpm (6.6 L/min)	bulk
EV3010-CP200-BP	WaterSense Showerhead	chrome	full body	2.0 gpm (7.6 L/min)	bulk