

evolve™

Multifunction Handshower

WITH MASSAGE & PAUSE

FEATURES

- Full body spray, massage spray & pause
- 50 rub-clean, anti-clog spray nozzles
- Pressure compensating flow regulation
- Stainless steel hose
- Shower arm mounting bracket
- 3 year warranty

PHYSICAL CHARACTERISTICS

- Handshower:
 - impact resistant ABS body
 - multi-function spray pattern
 - 50 rub-clean, anti-clog spray nozzles
- Hose: 59" stainless steel with ABS fittings
- Mount: ABS ½" NPT fittings (female)
- Weights:
 - hand shower: 5.0 oz. (.14 kg)
 - mounting bracket: 1.85 oz (.05 kg)
 - hose: 6.65 oz. (.19 kg)
- Spray face diameter: 3.125" (8 cm)
- Length: 9" (23 cm)

CODES / STANDARDS APPLICABLE

SPECIFIC MODEL MEETS OR EXCEEDS THE FOLLOWING:

- WaterSense & Uniform Plumbing Codes (cUPC): IAPMO IGC 244-2007a & ASME A112.18.1 / CSA B125.1-11
- Conforms to A112.18.1M. For use with automatic compensating valves rated at 1.1 gpm (4.2 L/min) or less.



CERTIFIED SUPERIOR PERFORMANCE


part	max flow at 80 psi	min flow at 45 psi
1.5 gpm Showerhead	1.5gpm (5.7 L/min)	1.1gpm (4.2 L/min)
1.75 gpm Showerhead	1.75gpm (6.6 L/min)	1.3gpm (4.9 L/min)
2.0 gpm Showerhead	2.0gpm (7.6 L/min)	1.5gpm (5.7 L/min)

PRODUCT SPECIFICATION

The Multifunction Handshower shall attach to shower arms with ½" NPT male fittings. The handshower has two distinct spray patterns; a 50 nozzle full body spray and a massaging spray. In addition, a pause feature enables users to save additional water and energy during their shower by lowering the flow to a slight trickle while soaping-up or shaving. The Multifunction Handshower includes a shower arm mounting bracket and 59" stainless steel hose with ABS fittings. The unit is both WaterSense and cUPC certified.

PERFORMANCE VS. WATERSENSE STANDARD

WaterSense was created by the EPA to establish minimum performance requirements for efficient showerheads with the goal of improving user satisfaction. This showerhead exceeds the WaterSense standard and, as a result, users receive a great feeling, water and energy saving shower regardless of their home's water pressure.

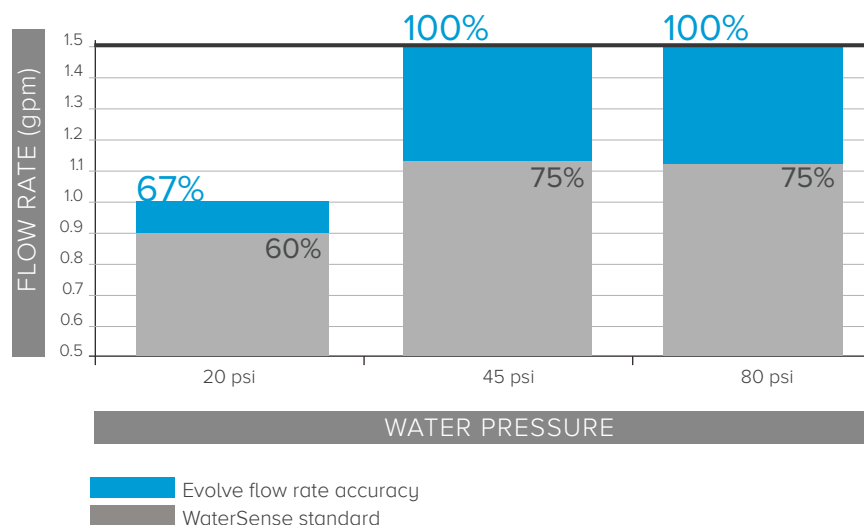

SPECIFIED MODEL

MODEL	DESCRIPTION	FINISH	SPRAY PATTERN	FLOW RATE	PKG
EV3040-CP150-SB	WaterSense Handshower	chrome	multi	1.5 gpm (5.7 L/min)	single
EV3040-CP175-SB	WaterSense Handshower	chrome	multi	1.75 gpm (6.6 L/min)	single
EV3040-CP200-SB	WaterSense Handshower	chrome	multi	2.0 gpm (7.6 L/min)	single
EV3040-CP150-BP	WaterSense Handshower	chrome	multi	1.5 gpm (5.7 L/min)	bulk
EV3040-CP175-BP	WaterSense Handshower	chrome	multi	1.75 gpm (6.6 L/min)	bulk
EV3040-CP200-BP	WaterSense Handshower	chrome	multi	2.0 gpm (7.6 L/min)	bulk